



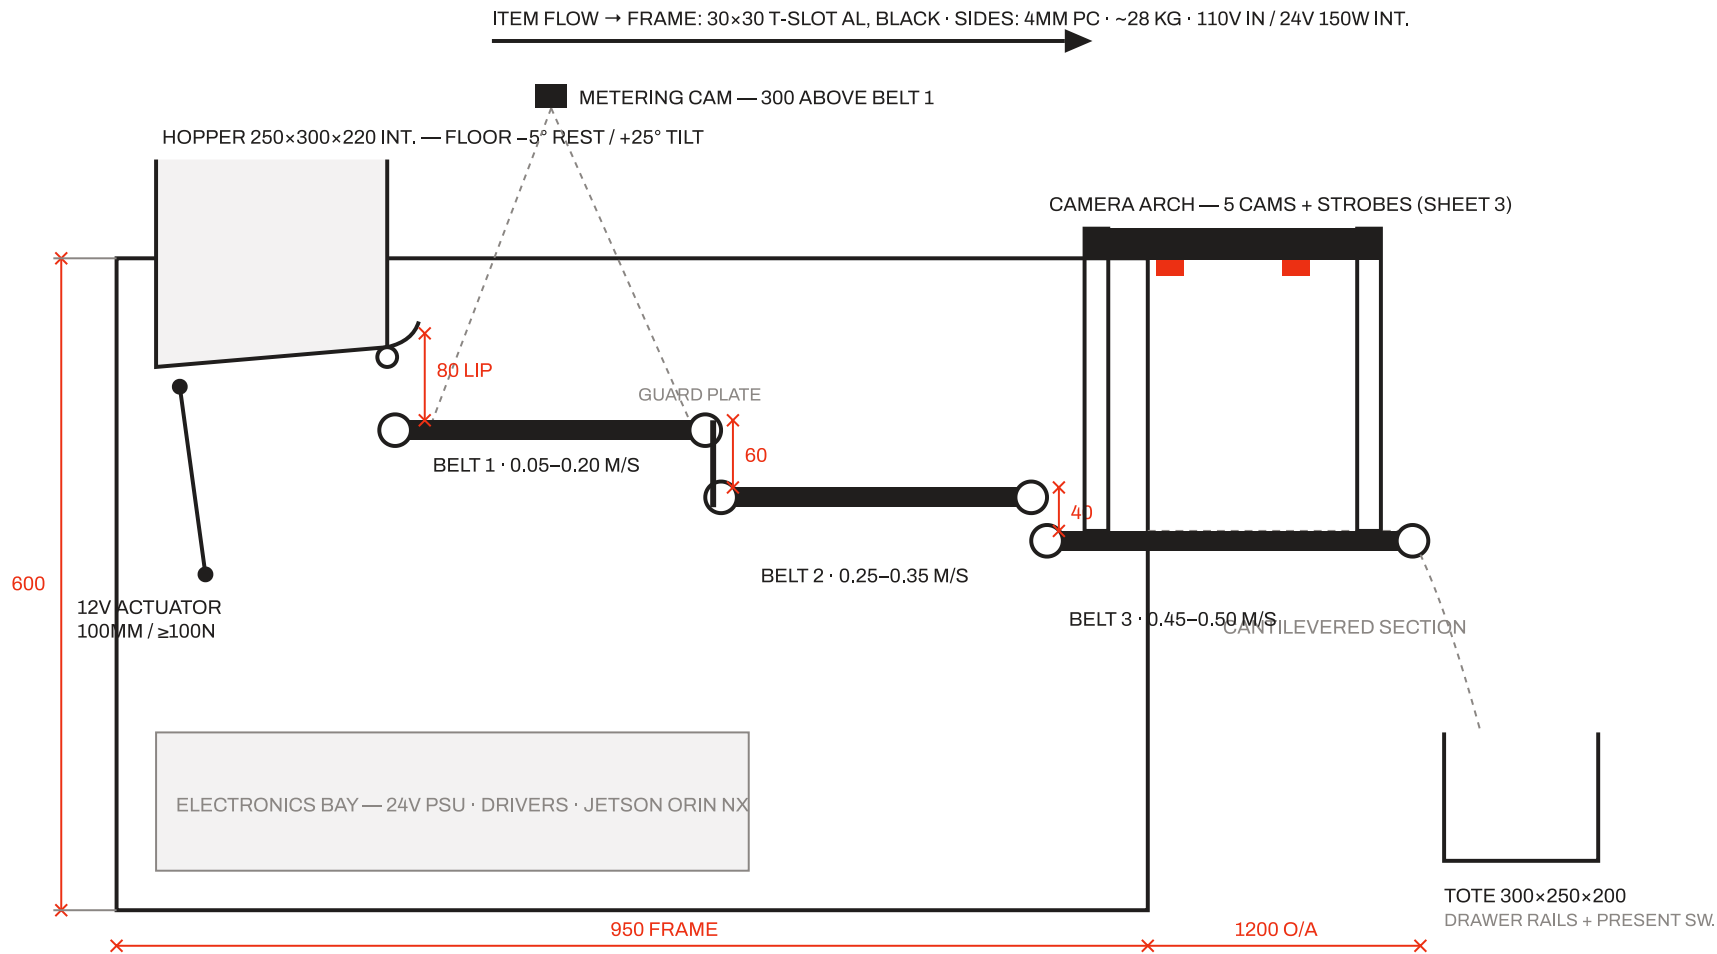


A TILTING HOPPER X 0–250	B METERING BELT 1 X 250–550	C SEPARATION BELT 2 X 550–850	D INSPECTION BELT 3 + ARCH X 850–1200	E EXIT + TOTE END OF FRAME
---------------------------------------	--	--	--	---

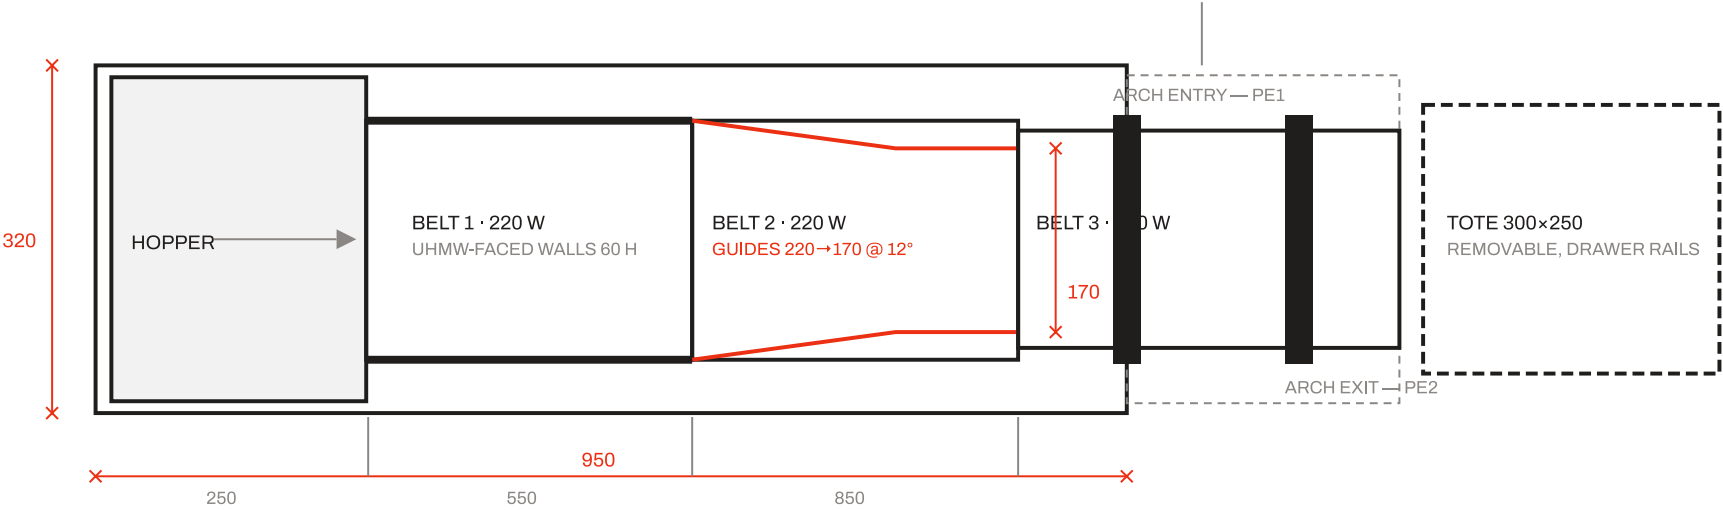


TRANSFER B2→B3: 40 DROP OR POLISHED DEAD-PLATE — FRAME ACCEPTS BOTH (TUNE AT COMMISSIONING).
GUIDES: 1.5 STAINLESS RAIL, UHMW STRIP FACING. WATERFALL 1 GUARD PLATE FULL WIDTH BEHIND DROP.
LID: HINGED PC OVER ZONES A–C, MAGNETIC INTERLOCK. FRONT PANEL: E-STOP · POWER · STATUS LED. TABLET ON VESA ARM, FRONT RIGHT.

SECTION — LOOKING ALONG TRAVEL

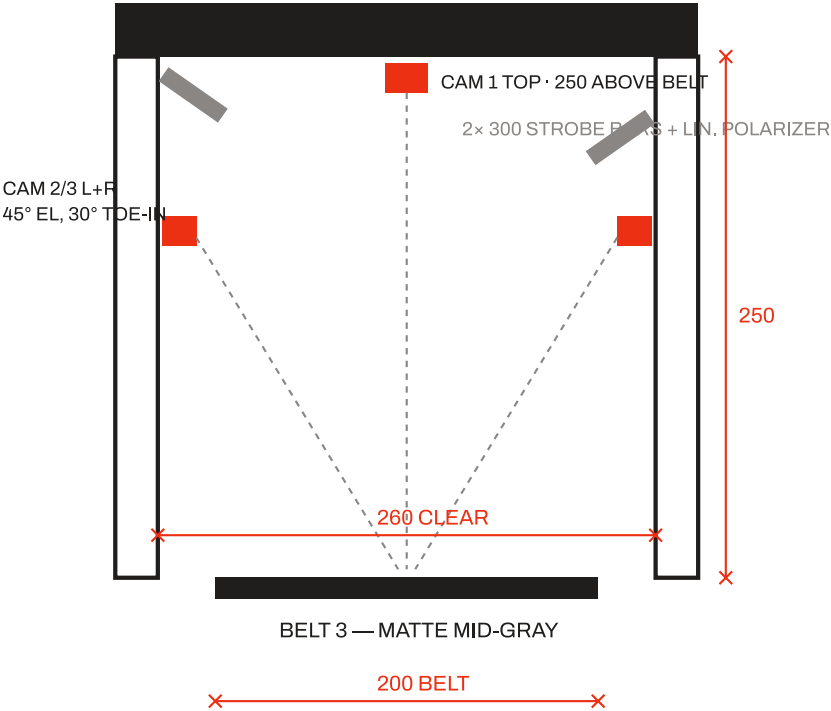


ALL CAMS: 5MP GLOBAL SHUTTER (IMX264-CLASS), 6–8MM LENS, CIRCULAR POLARIZER.

SECTION — ALONG BELT (TRAVEL →)

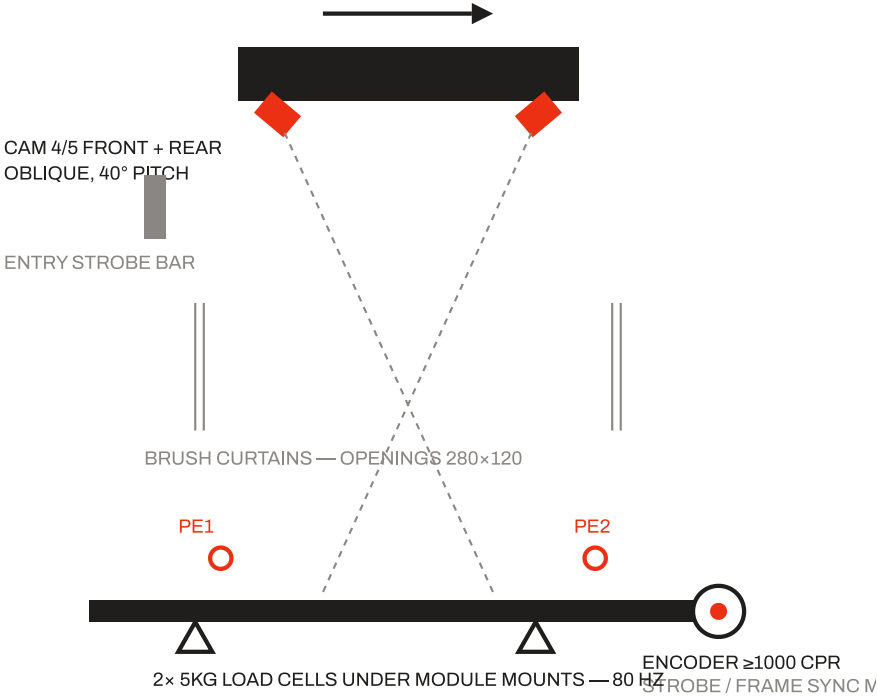


STROBES ENCODER-TRIGGERED, ≤2MS PULSE. ITEMS WITH BLOCKED SIDE VIEWS ARE FLAGGED

SIDE — DEPTH 450 (REAR ← → FRONT)
LIFT-OFF HOPPER, TOP REAR

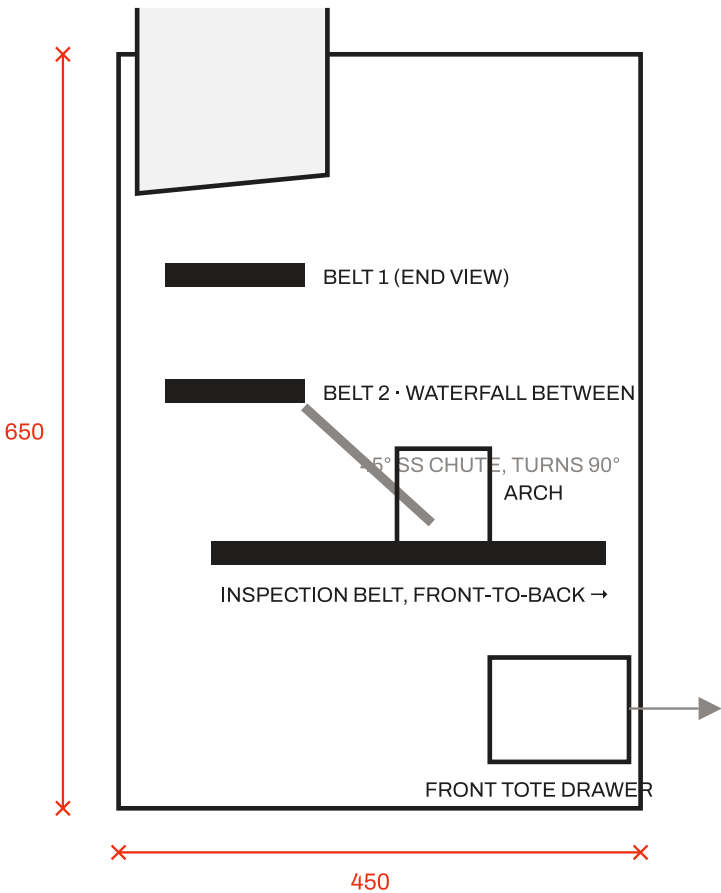

FRONT — WIDTH 550

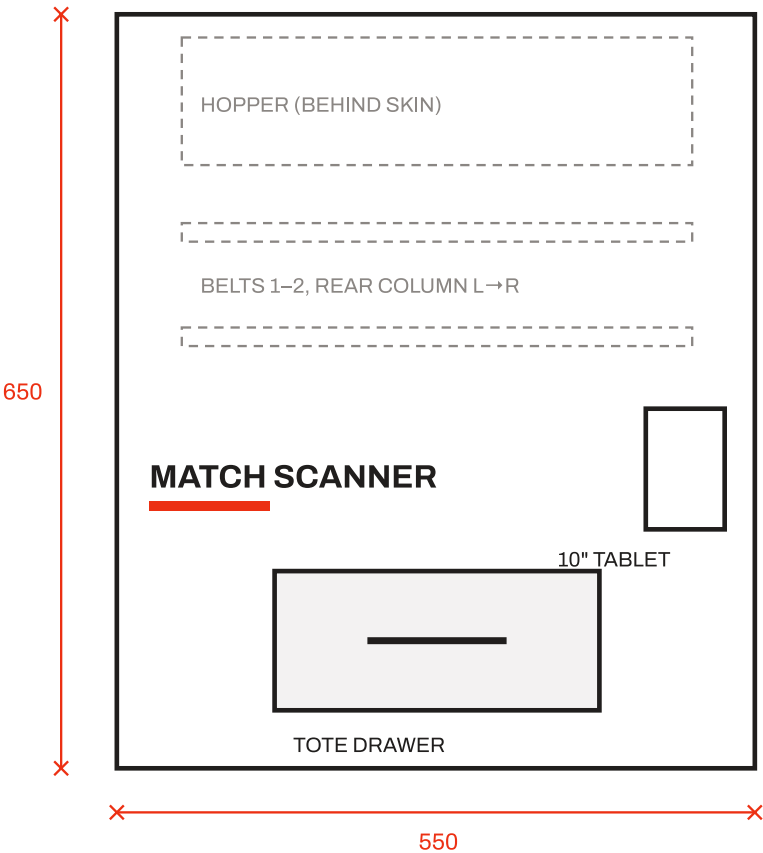

SHEET-METAL SKIN • INTERLOCKED LID • SAME 3-STAGE FLOW, FOLDED.